

Gruppo Incasso Plus No-Drop™

80cm | Stainless Steel | F3GND80S2




Product Information

Motor Speed (m ³ /h)	800
Filter	Technopolymer anti-condensation no-drop filter
Controls	Electronic control
Lighting	2 x 1.8W Dynamic LED (2700K - 5600K)
Speed Settings	3 Speed + boost
Timer Function	15 min auto shut-off
Ducting	150mm circular outlet
Grease Filter Alarm	Yes
Dishwasher Safe Filters	Yes
Remote Control	Optional
Charcoal Filter	Optional

Technical Details

Dimensions (mm)	832 (W) x 341 (H) x 298 (D)
Suitable Cooking Surface (cm)	75-100
Cut-Out (mm)	807 x 267

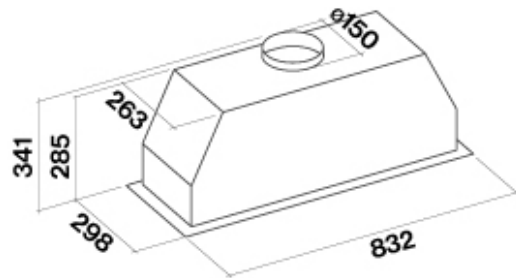

Features

- Dimmable lighting
- Dynamic light
- Emptied liquid collector
- No-Drop™ System anti-condensation patented technology

Gruppo Incasso Plus No-Drop™

80cm | Stainless Steel | F3GND80S2

Version

Plus - Built-in - 90 cm - Inox -
800 m3/h


Collection

No-Drop

EAN code

8034122367262

ENERGY LABEL

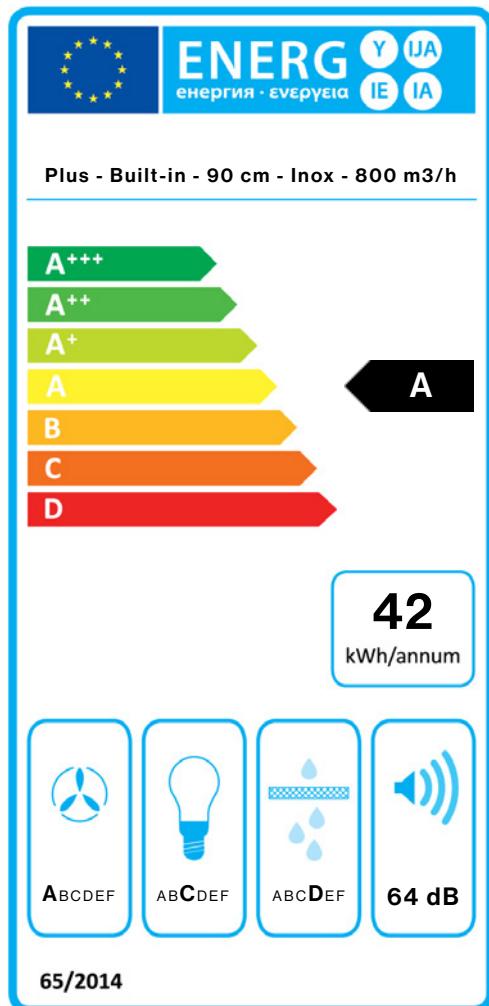

PF		
S	Falmecc Spa	
M	Plus - Built-in - 90 cm - Inox - 800 m3/h	
AEC	42,4	kWh/a
EEC	A	
FDE	32,8	
FDEC	A	
LE	18,0	
LEC	C	
GFE	70,0	
GFEC	D	
Qmin	304,0	m ³ /h
Qmax	575,0	m ³ /h
Qboost	697,0	m ³ /h
SPEmin	51	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,28	W
PI		
F	0.8	
EEL	46,3	
Qbep	417,0	m ³ /h
Pbep	379	Pa
Qboost	697,0	m ³ /h
Wbep	134,0	W
WL	4,50	W
Emiddle	81	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.