

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

FREESTANDING QUAD DOOR REFRIGERATOR, 90.5CM



OVERVIEW

This Quad Door Refrigerator Freezer has recessed handles and flat doors for a streamlined look to fit any kitchen aesthetic. With a generous 730L capacity it features a large humidity bin and adjustable shelving in the fridge, plus full extension bins in the freezer for ample storage space. Variable Temperature Zone has four food modes for optimal storage, while ActiveSmart™ technology keeps food fresher for longer.

SERIES 7 MODEL

Freestanding Quad Door Refrigerator Freezer, 90.5cm, 730L, Ice & Water, Black Matte Glass, Minimal Style
RF730QZUVB1

FEATURES

- ① Designed to match flush kitchen cabinetry.
- ② Generous 730L capacity.
- ③ Internal water filter with slimline dispenser and automatic ice maker.
- ④ Choice of four food modes with Variable Temperature Zone technology: Freezer, Soft Freeze, Chill or Fridge mode.
- ⑤ ActiveSmart™ technology helps keep food fresher for longer.
- ⑥ Large humidity bin in the fridge for ample storage.
- ⑦ Spacious, full-extension bins in the freezer.
- ⑧ Real stainless steel and solid glass for interior shelving.
- ⑨ Available in sleek black matte glass.
- ⑩ Recessed handle doors for a streamlined look.

ACCESSORIES

- ① Replacement Water Filter 847200.

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

FREESTANDING QUAD DOOR REFRIGERATOR, 90.5CM

PRODUCT SPECIFICATIONS


| | |
|-------------------|---|
| Model No. | RF730QZUVB1 |
| Dimensions | H 1900mm W 905mm D 748mm |
| Weight | 145kg |
| Electrical | |
| Supply | 220-240VAC, 50Hz |
| Service | 1.8A |
| Receptacle | 3-prong grounding-type |
| Plumbing | |
| Supply | Water Connection Kit: 3.5m tubing with tap adaptor |
| Pressure | Min 150kPa (22psi), max 827kPa (120psi) @ 20°C |

ELECTRICAL

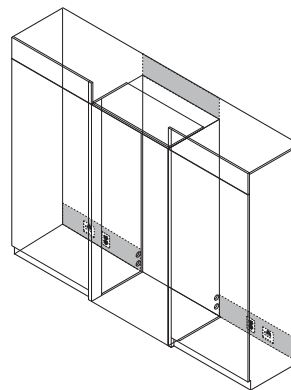

Note: Electrical connection should be located in an adjacent cabinet to either side of the fridge or above the fridge cavity. We recommend to use an isolating switch that is easily accessible to the user after the refrigerator is installed.

PRODUCT DIMENSIONS

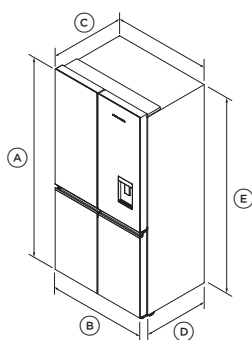

ISO VIEW


| | mm |
|------------------------------|------|
| (A) Overall height | 1900 |
| (B) Overall width | 905 |
| (C) Overall depth* | 748 |
| (D) Depth of chassis** | 660 |
| (E) Height to top of chassis | 1867 |
| Depth of door opening*** | 1142 |

*Includes doors

**Excludes doors

***Not illustrated

CAVITY DIMENSIONS: STANDARD INSTALLATION

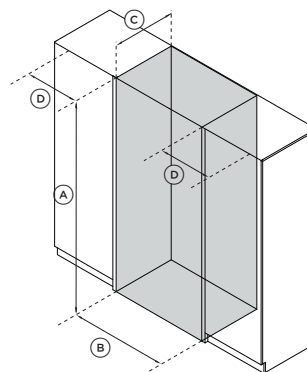

ISO VIEW

| | mm |
|---------------------------------|------|
| (A) Overall internal height | |
| • proud | 1920 |
| • flush | 1945 |
| (B) Overall width | |
| • proud | 945 |
| • flush | 1125 |
| (C) Overall depth | |
| • proud | 690 |
| • flush | 778 |
| (D) Door clearance to side wall | |
| • proud* | 350 |
| • flush* | 260 |

*Full rotation

Includes minimum air clearance requirements