



# HYDROTAP G5 BCS ARC PLUS BRUSHED GOLD



BOILING



CHILLED




SPARKLING

FILTERED

## Order Code H5L783Z07AU

Zip HydroTap Design Range Boiling, Chilled, Sparkling, Filtered water tap features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and 2 disposable CO2 cylinders.

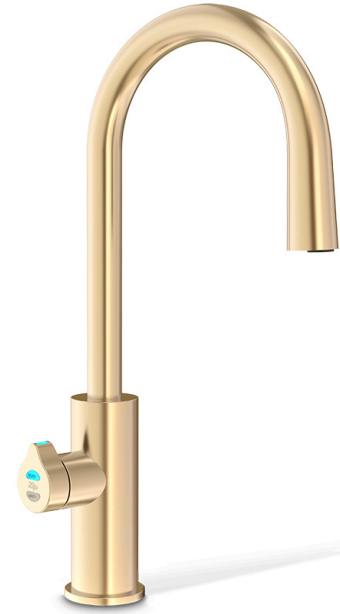

Manufacturing Code H5L783Z07AU

Capacity Residential

**Tap** Zip HydroTap Design Range ARC Plus Tap (Brushed Gold)

**Water Pressure** Min 250kPa - Max 700kPa

**Water Connection** 1/2" BSP (G1/2)

**Water Supply Requirements** Cold

**Water Valves** Integrated 500kPa Pressure limiting valve and Dual Check Valve

**Power Rating** 1.53kW 220-240V 50Hz

**Power Supply** 1 x 10 Amp socket outlet

**Dimensions** W339mm x D483mm x H333mm

**Product Approvals** WaterMark, RCM, ARC

**Warranty**

5 years (appliance warranty 36 months plus additional 24 months tank warranty)

**Installation Requirements**

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)

**Installation Detail**

IKL2 HydroTap G5 v1.2 02.2025 BCS BCS20

Contact your local service provider if ventilation is not suitable

**Ventilation requirements**

**Option 1. Cupboard with 40mm min overhang**

50mm min clearance beside inlet

40mm min

Air exhaust cut-out

min. 40

300

**Option 2. Cupboard with less than 40mm overhang**

50mm min clearance beside inlet

Floor mounting plate cut-out

40

300

Air exhaust cut-out

60

285

**HydroTap Tap options**

**HydroTap Arc Plus Tap**

30

162

237

134

204

Ø45

Ø54

87

82

Ø35mm hole required

**HydroTap Cube Plus Tap**

30

162

237

134

204

Ø45

Ø54

87

82

Ø35mm hole required

**Tap Positioning**

Position the Tap to dispense into the sink. Alternatively, mount on a Font, available as an accessory.

Ø35mm hole for Tap

Sink

HydroTap Arc Plus

4mm buffer pad air space

339

50 min.

**Clearance Envelope**

200 min.

333

380

CO<sub>2</sub> gas cylinder

Ø105

Mains cold water isolation valve (not supplied)

IEC Flex & Plug 230-240V, 50Hz power outlet

483

**Standalone Font**

part no. 93441

shown with Arc Plus Tap

162

232

174

387

174

3-off, Ø10 holes @ 155mm PCD, equispaced

Ø140 hole for bowl

Ø176 outline of Font

Ø35 hole for tap

120°

174 for HydroTap Arc/Cube

**HydroTap G5 BCS Home**

shown with HydroTap Arc Plus and Standalone Font (optional accessory)

SCALE 1:5  
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

